



Codes

E11070-T160DSE	E11070-T200DSE	E11070-T300DSE	E11070-T500DSE
----------------	----------------	----------------	----------------

Fegen Solar Modules SM series are All-in-One, Plug & Play, Outdoor, Scalable enclosures that incorporate all solar thermal and solar electric distribution gear for buildings in one device.

- No need of a conventional indoor boiler room
- No on-site labor cost
- Immediate start-up
- No responsibility conflicts
- Easy control and maintenance
- Scalable for infinite combinations

- **Tight single door dimensions**
- **160-500 liters water storage**
- **Integrated heating element**
- **Simple DC pump design**
- **Solar back up system for redundancy**
- **Defrost system for reliability**
- **Solar pool gear option (P extension coded)**
- **Cost efficient mounted outdoors 1ph 7kWdC inverter**

CABIN GENERAL CHARACTERISTICS

	Thermal Part
Type	RITTAL TS 8
External dimensions W x H x D (front view)	800 x 2000 x 800 mm / 31,50 x 78,74 x 31,50 inch
Mounting plate W x H	Width: 699 mm, Height: 1896 mm
Weight/pack	137 kg
Material	Sheet steel
Cold / Hot Supply - Brass	1 ¼ inch
Color	RAL 7035
Protection category IP to IEC 60 529	IP 55
Doors	1
Light	Auto door power On/Off - 600 lumens
Scalability	Unlimited
Protection	Over-temperature, Anti-freeze control
Approvals	Bureau Veritas, CSA, TÜV, DNV-GL, Lloyds Register of Shipping, Russian Maritime Register of Shipping, UL + C-UL
Certificates	EAC,IK-Code, Protection category
Declarations	Declaration of conformity, Manufacturer's declaration
Certification	SRCC, Solar Keymark, CE

CABIN LIGHTING SYSTEM-TECHNICAL SPECIFICATIONS

	General Data
Type	RITTAL LED system light
Material	Light body: Extruded aluminium, Light cover: Polycarbonate (halogen-free) Light ends: PC-ABS (halogen-free)
Color	Enclosure: RAL 7016
Protection category IP to IEC 60 529	IP 20
Dimensions	Width: 337 mm, Height: 55 mm, Depth: 23 mm
Rated operating voltage	100 V - 240 V, 1~, 50 Hz/60 Hz
Operating temperature	Operation (environment): -20°C...+55°C
Power consumption	7 W
Luminous flux	600 lm
Light colour	4000 K (neutral white)
Protection category	II (all-insulated)
Weight/pack	0.35 kg
Approvals	CCC, ENEC
Certificates	EAC

SOLAR TANK CHARACTERISTICS	T160	T200	T300	T500
General Data				
Type	Sammler SV			TESY EV
Solar tank capacity	160 lt / 40 gal	200 lt / 50 gal	300 lt / 80 gal	500 lt / 132 gal
External dimensions W x H	580 x 1058 mm 22,83 x 41,6 inch	580 x 1292 mm 22,83 x 50,9 inch	580 x 1735 mm 22,83 x 68,3 inch	750 x 1674 mm 29,5 x 66 inch
Weight	67 kg / 235 lb	82 kg / 235 lb	107 kg / 235 lb	145 kg / 320 lb
Number of boilers	1			
Max pressure primary circuit	3 bar			8 bar
Max pressure secondary circuit	3 bar			6 bar
Electric Resistance	1.50 – 4.00 KW (UL Ready) - not included			
Anti-corrosion protection	2 x magnesium anodes			
Certification	SRCC, Solar Keymark, CE			Solar Keymark, CE
DC CIRCULATION PUMP				
General Data				
Type	DC Solar Pump			
Power	10W (6-24 Vdc)			
Max Capacities	22 Lpm / 6 Gpm			
Max heads	3,2 m / 10,5 ft			
Suitable fluids	Water / Glycol			
Maximum working temperature	110 °C / 230 °F			
Max. working pressure	10 bar			
Number of DC Pumps	1			
Protection	Over-temperature, overload, Over voltage, dry running protection			
Temperature Sensors				
Platinum RTD type	1,000 ohm			
Collector sensor working range	-58 - 355 °F (-50 - 180 °C)			
Tank sensor working range	15 - 175 °F (-10 - 80 °C)			
Length of collector black cable	60 in (1.5 m)			
Length of tank sensor gray cable	95 in (2.5 m)			
Glycol (recommended type)				
Type	DOWFROST HD			
Recommended temperature range	-46°C..163°C			
Freezing Point	-33.5 °C			
Boiling Point @ 1 bar	105.6 °C			
Freeze protection temperature	-51 °C			
Burst protection temperature	-73 °C			
Weight % Propylene Glycol	94			
Weight % performance additives	6			
Specific gravity (15 °C)	1.053 - 1.062			
pH of Solution	9.5 - 10.5			
Reserve alkalinity	15.0 ml			

TECHNICAL DATA AND TYPES

Fimer type code

UNO-DM-6.0-TL-PLUS-Q

Input side

Absolute maximum DC input voltage ($V_{max,abs}$)	600 V
Start-up DC input voltage (V_{start})	200 V (adj. 120...350 V)
Operating DC input voltage range ($V_{dmin} \dots V_{dmax}$)	0.7 x V_{start} ...580 V (min 90 V)
Rated DC input voltage (V_{dcr})	360 V
Rated DC input power (P_{dcr})	6200 W
Number of independent MPPT	2
Maximum DC input power for each MPPT ($P_{MPPTmax}$)	4000W (MPPT1), 3500W (MPPT2)
DC input voltage range with parallel configuration of MPPT at P_{acr}	200...480V
DC power limitation with parallel configuration of MPPT	Linear derating from Max to 500W [480V ≤ VMPPT ≤ 580V]
DC power limitation for each MPPT with independent configuration of MPPT at P_{acr} max unbalance example	On MPPT1: 4000W (200V ≤ VMPPT ≤ 480) On MPPT2: P_{dcr} -4000W (195V ≤ VMPPT ≤ 480) or 3500W (305V ≤ VMPPT ≤ 480) with no power on MPPT1
Maximum DC input current (I_{dcrmax}) / for each MPPT ($I_{MPPTmax}$)	31,5 A / 20-11,5 A, (MPPT1-MPPT2)
Maximum input short circuit current for each MPPT	25 A
Number of DC input pairs for each MPPT	2 on channel 1: 1 on channel 2
DC connection type ¹⁾	Quick Fit PV Connector

Input protection

Reverse polarity protection	Yes, from limited current source
Input over voltage protection for each MPPT-varistor	Yes
Photovoltaic array isolation control	According to local standard
DC switch rating for each MPPT (version with DC switch)	32A / 600 V

Output side

AC grid connection type	Single-phase
Rated AC power (P_{acr} @ $\cos\phi=1$)	6000 W
Maximum AC output power (P_{acmax} @ $\cos\phi=1$)	6000 W
Maximum apparent power (S_{max})	6650 VA
Rated AC grid voltage ($V_{ac,r}$)	230 V
AC voltage range ²⁾	180...264 V
Maximum AC output current ($I_{ac,max}$)	30.0 A
Contributory fault current	40.0 A
Rated output frequency (f_r) ³⁾	50/60 Hz
Output frequency range ($f_{min} \dots f_{max}$) ³⁾	47...53/57...63 Hz
Nominal power factor and adjustable range	> 0.995, adj. ± 0.8
Total current harmonic distortion	< 3%
AC connection type	Terminal Block

Output protection

Anti-islanding protection	According to local standard
Maximum external AC overcurrent protection	40.0 A
Output overvoltage protection - varistor	2 (L - N / L - PE)

Operating performance

Maximum efficiency (η_{max})	97.4%
Weighted efficiency (EURO/CEC)	97.0% / -
Feed in power threshold	8 W
Night consumption	<0.4 W

TECHNICAL DATA AND TYPES

Fimer Type code

UNO-DM-6.0-TL-PLUS-Q

Embedded communication

Embedded communication interface 4)	Wireless
Embedded communication protocol	ModBus TCP (SunSpec)
Commissioning tool	Web User Interface, Aurora Manager Lite
Monitoring	Plant Portfolio Manager, Plant Viewer, Plant Viewer for Mobile, Energy Viewer

Optional board UNO-DM-COM kit

Optional communication interface	RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF
Optional communication protocol	ModBus RTU (SunSpec), Aurora Protocol

Optional board UNO-DM-PLUS Ethernet COM kit

Optional communication interface	Ethernet, RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF
Optional communication protocol	ModBus TCP (SunSpec), ModBus RTU (SunSpec), Aurora Protocol

Environmental

Ambient temperature range	-25...+60°C (-13...+ 140°F) with derating above 45°C/113°F
Relative humidity	0...100 % condensing
Maximum operating altitude without derating	2000 m / 6560 ft

Physical


Environmental protection rating	IP 65
Cooling	Natural
Dimension (H x W x D)	418 mm x 553 mm x 180 mm
Weight	20,5 kg
Mounting system	Wall bracket

Safety

Isolation level	Transformerless
Marking	CE (50 Hz only), RCM
Safety and EMC standard	EN 50178, IEC/EN 62109-1, IEC/EN 62109-2, AS/NZS 3100, EN 61000-6-1, EN 61000-6-3, EN 61000-3-11, EN 61000-3-12
Grid standard (check your sales channel for availability) 5)	CEI 0-21, DIN V VDE V 0126-1-1, ITC-BT-40, AS 4777, INMETRO Ordinances 357-2014

Available products variants

Standard	UNO-DM-6.0-TL-PLUS-B-G-QU
With DC switch	UNO-DM-6.0-TL-PLUS-SB-G-QU

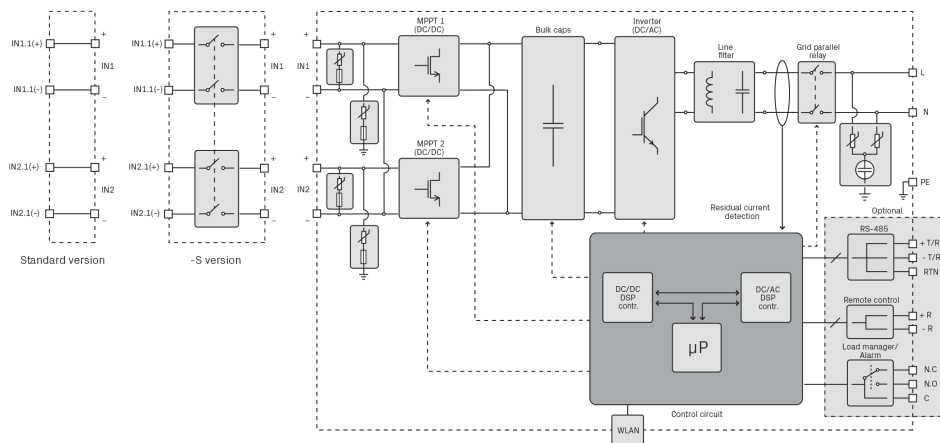

UNO-DM-6.0-TL-PLUS-Q string inverter block diagram

Models using other branded solar thermal or solar electric gear upon demand.