



Codes			
E13060-T160DSE	E13060-T200DSE	E13060-T300DSE	E13060-T500DSE
E13080-T160DSE	E13080-T200DSE	E13080-T300DSE	E13080-T500DSE
E13090-T160DSE	E13090-T200DSE	E13090-T300DSE	E13090-T500DSE

Fegen Solar Modules SM series are All-in-One, Plug & Play, Outdoor, Scalable enclosures that incorporate all solar thermal and solar electric distribution gear for buildings in one device.

- No need of a conventional indoor boiler room
- No on-site labor cost
- Immediate start-up
- No responsibility conflicts
- Easy control and maintenance
- Scalable for infinite combinations

- **Tight single door dimensions**
- **160-500 liters water storage**
- **Integrated heating element**
- **Simple DC pump design**
- **Solar back up system for redundancy**
- **Defrost system for reliability**
- **Solar pool gear option (P extension coded)**
- **Cost efficient mounted outdoors 3ph 6-9kWdC inverter**

CABIN GENERAL CHARACTERISTICS

	Thermal Part
Type	RITTAL TS 8
External dimensions W x H x D (front view)	800 x 2000 x 800 mm / 31,50 x 78,74 x 31,50 inch
Mounting plate W x H	Width: 699 mm, Height: 1896 mm
Weight/pack	137 kg
Material	Sheet steel
Cold / Hot Supply - Brass	1 ¼ inch
Color	RAL 7035
Protection category IP to IEC 60 529	IP 55
Doors	1
Light	Auto door power On/Off - 600 lumens
Scalability	Unlimited
Protection	Over-temperature, Anti-freeze control
Approvals	Bureau Veritas, CSA, TÜV, DNV-GL, Lloyds Register of Shipping, Russian Maritime Register of Shipping, UL + C-UL
Certificates	EAC,IK-Code, Protection category
Declarations	Declaration of conformity, Manufacturer's declaration
Certification	SRCC, Solar Keymark, CE

CABIN LIGHTING SYSTEM-TECHNICAL SPECIFICATIONS

	General Data
Type	RITTAL LED system light
Material	Light body: Extruded aluminium, Light cover: Polycarbonate (halogen-free) Light ends: PC-ABS (halogen-free)
Color	Enclosure: RAL 7016
Protection category IP to IEC 60 529	IP 20
Dimensions	Width: 337 mm, Height: 55 mm, Depth: 23 mm
Rated operating voltage	100 V - 240 V, 1~ , 50 Hz/60 Hz
Operating temperature	Operation (environment): -20°C...+55°C
Power consumption	7 W
Luminous flux	600 lm
Light colour	4000 K (neutral white)
Protection category	II (all-insulated)
Weight/pack	0.35 kg
Approvals	CCC, ENEC
Certificates	EAC

SOLAR TANK CHARACTERISTICS	T160	T200	T300	T500
General Data				
Type	Sammler SV			TESY EV
Solar tank capacity	160 lt / 40 gal	200 lt / 50 gal	300 lt / 80 gal	500 lt / 132 gal
External dimensions W x H	580 x 1058 mm 22,83 x 41,6 inch	580 x 1292 mm 22,83 x 50,9 inch	580 x 1735 mm 22,83 x 68,3 inch	750 x 1674 mm 29,5 x 66 inch
Weight	67 kg / 235 lb	82 kg / 235 lb	107 kg / 235 lb	145 kg / 320 lb
Number of boilers	1			
Max pressure primary circuit	3 bar			8 bar
Max pressure secondary circuit	3 bar			6 bar
Electric Resistance	1.50 – 4.00 KW (UL Ready) - not included			
Anti-corrosion protection	2 x magnesium anodes			
Certification	SRCC, Solar Keymark, CE			Solar Keymark, CE

DC CIRCULATION PUMP

General Data	
Type	DC Solar Pump
Power	10W (6-24 Vdc)
Max Capacities	22 Lpm / 6 Gpm
Max heads	3,2 m / 10,5 ft
Suitable fluids	Water / Glycol
Maximum working temperature	110 °C / 230 °F
Max. working pressure	10 bar
Number of DC Pumps	1
Protection	Over-temperature, overload, Over voltage, dry running protection

Temperature Sensors

Platinum RTD type	1,000 ohm
Collector sensor working range	-58 - 355 °F (-50 - 180 °C)
Tank sensor working range	15 - 175 °F (-10 - 80 °C)
Length of collector black cable	60 in (1.5 m)
Length of tank sensor gray cable	95 in (2.5 m)

Glycol (recommended type)


Type	DOWFROST HD
Recommended temperature range	-46°C..163°C
Freezing Point	-33.5 °C
Boiling Point @ 1 bar	105.6 °C
Freeze protection temperature	-51 °C
Burst protection temperature	-73 °C
Weight % Propylene Glycol	94
Weight % performance additives	6
Specific gravity (15 °C)	1.053 - 1.062
pH of Solution	9.5 - 10.5
Reserve alkalinity	15.0 ml

TECHNICAL DATA AND TYPES

Fimer type code	TRIO-5.8-TL-OUTD	TRIO-7.5-TL-OUTD	TRIO-8.5-TL-OUTD
Input side			
Absolute maximum DC input voltage ($V_{max,abs}$)		1000 V	
Start-up DC input voltage (V_{start})		350 V (adj. 200...500 V)	
Operating DC input voltage range ($V_{dcrmin} \dots V_{dcrmax}$)		0.7 x $V_{start} \dots 0.950$ V (min 200 V)	
Rated DC input voltage (V_{dcr})		620 V	
Rated DC input power (P_{dcr})	5950 W	7650 W	8700 W
Number of independent MPPT	1	2	2
Maximum DC input power for each MPPT ($P_{MPPTmax}$)	6050 W Linear derating from max to null [800 V ≤ V_{MPPT} ≤ 950 V]	4800 W	4800 W
DC input voltage range with parallel configuration of MPPT at P_{acr}	-	320...800 V	320...800 V
DC power limitation with parallel configuration of MPPT		Linear derating from max to null [800 V ≤ V_{MPPT} ≤ 950 V]	
DC power limitation for each MPPT with independent configuration of MPPT at P_{acr} max unbalance example	-	4800 W [320 V ≤ V_{MPPT} ≤ 800 V] the other channel: P_{dcr} = 4800 W [215 V ≤ V_{MPPT} ≤ 800 V]	4800 W [320 V ≤ V_{MPPT} ≤ 800 V] the other channel: P_{dcr} = 4800 W [290 V ≤ V_{MPPT} ≤ 800 V]
Maximum DC input current (I_{dcrmax}) / for each MPPT ($I_{MPPTmax}$)	18.9 A	30.0 A / 15.0 A	30.0 A / 15.0 A
Maximum input short circuit current for each MPPT	24 A	20 A	20 A
Number of DC input pairs for each MPPT		2 (-S version)	
DC connection type ¹⁾	PV quick fit connector 1) on -S version / Screw terminal block on standard version		
Input protection			
Reverse polarity protection		Yes, from limited current source	
Input over voltage protection for each MPPT-varistor		Yes, 4	
Photovoltaic array isolation control		According to local standard	
DC switch rating for each MPPT (version with DC switch)		16 A / 1000 V, 25 A / 800 V	
Output side			
AC grid connection type		Three-phase 3W+PE or 4W+PE	
Rated AC power (P_{acr} @ $\cos\phi=1$)	5800 W	7500 W	8500 W
Maximum apparent power (S_{max})	5800 VA	7500 VA	8500 VA
Rated AC grid voltage (V_{acr})		400 V	
AC voltage range ²⁾		320...480 V ²⁾	
Maximum AC output current ($I_{ac,max}$)	10.0 A	12.5 A	14.5 A
Contributory fault current	12.0 A	14.5 A	16.5 A
Rated output frequency (f_r) ³⁾		50/60 Hz	
Output frequency range ($f_{min} \dots f_{max}$) ³⁾		47...53 Hz / 57...63 Hz ³⁾	
Nominal power factor and adjustable range	> 0.995, adj. ± 0.9 with P_{acr} = 5.22 kW, ± 0.8 with max 5.8 kVA	> 0.995, adj. ± 0.9 with P_{acr} = 6.75 kW, ± 0.8 with max 7.5 kVA	> 0.995, adj. ± 0.9 with P_{acr} = 7.65 kW, ± 0.8 with max 8.5 kVA
Total current harmonic distortion		< 2%	
AC connection type		Screw terminal block, cable gland M32	
Output protection			
Anti-islanding protection		According to local standard	
Maximum external AC overcurrent protection	16.0 A	16.0 A	20.0 A
Output overvoltage protection - varistor		4 plus gas arrester	
Operating performance			
Maximum efficiency (η_{max})		98.0%	
Weighted efficiency (EURO/CEC)	97.4% / -	97.5% / -	97.5% / -
Feed in power threshold	32 W	36 W	36 W
Night consumption		< 3 W	

User interface

Fimer Type code	TRIO-5.8-TL-OUTD	TRIO-7.5-TL-OUTD	TRIO-8.5-TL-OUTD
Communication			
Wired local monitoring	Ethernet card with webserver (opt.), PVI-USB-RS232_485 (opt.)		
Remote monitoring	Ethernet card (opt.), VSN300 Wifi Logger Card (opt.), VSN700 Data Logger (opt.)		
Wireless local monitoring	VSN300 Wifi Logger Card (opt.)		
User interface	Graphic display		
Environmental			
Ambient temperature range	-25...+60°C / -13...140°F with derating above 50°C/122°F		
Relative humidity	0...100 % condensing		
Sound pressure level, typical	50 dBA @ 1 m		
Maximum operating altitude without derating	2000 m / 6560 ft		
Physical			
Environmental protection rating	IP 65		
Cooling	Natural		
Dimension (H x W x D)	641mm x 429 mm x 220 mm / 25.2" x 16.9" x 8.7" (855 mm x 429 mm x 237 mm / 33.7" x 16.9" x 9.3" with open front cover)		
Weight	25.0 kg / 55.1 lbs	28.0 kg / 61.7 lbs	28.0 kg / 61.7 lbs
Mounting system	Wall bracket		
Safety			
Isolation level	transformerless		
Marking	CE (50 Hz only), RCM		
Safety and EMC standard	EN 62109-1, EN 62109-2, AS/NZS3100, EN 61000-6-2, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3		
Grid standard (check your sales channel for availability) 5)	CEI 0-21, CEI 0-16, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G83/2, G59/3, RD 1699, RD 413, NRS-097-2-1, AS 4777, IEC 61727, IEC 62116, VFR 2014		
Available products variants			
Standard	TRIO-5.8-TL-OUTD-400	TRIO-7.5-TL-OUTD-400	TRIO-8.5-TL-OUTD-400
With DC switch	TRIO-5.8-TL-OUTD-S-400	TRIO-7.5-TL-OUTD-S-400	TRIO-8.5-TL-OUTD-S-400

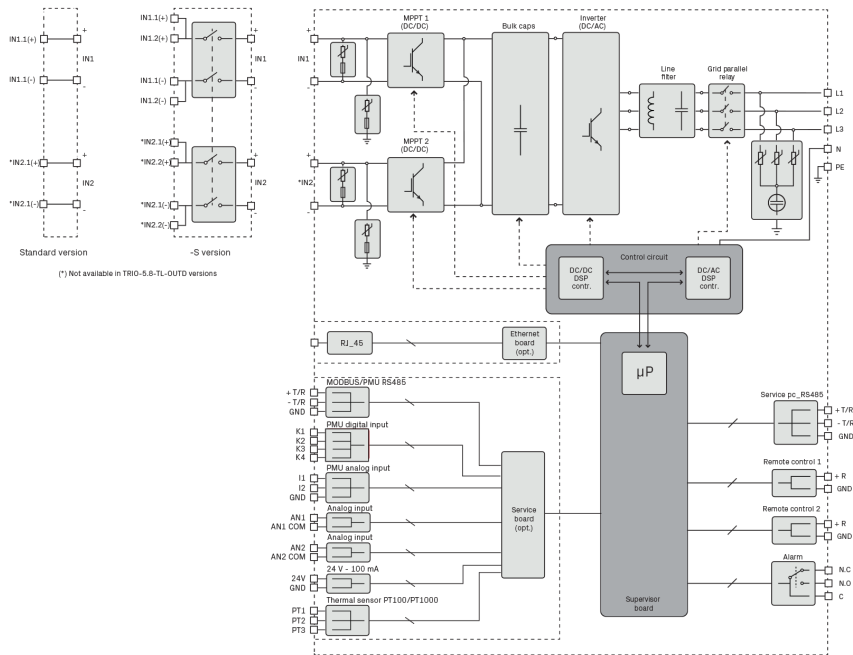

TRIO-5.8/7.5/8.5-TL-OUTD string inverter block diagram

Models using other branded solar thermal or solar electric gear upon demand.