



Codes

E21080-T40ASU

E21080-T50ASU

E21080-T80ASU

Fegen Solar Modules SM series are All-in-One, Plug & Play, Outdoor, Scalable enclosures that incorporate all solar thermal and solar electric distribution gear for buildings in one device.

- No need of a conventional indoor boiler room
- No on-site labor cost
- Immediate start-up

- No responsibility conflicts
- Easy control and maintenance
- Scalable for infinite combinations

- **Tight single door dimensions**
- **40-80 gallons water storage**
- **Integrated heating element**
- **Robust AC pump design with controller**
- **Solar back up system for redundancy**
- **Defrost system for reliability**
- **Solar pool gear option (P extension coded)**
- **Cost efficient mounted outdoors 1ph 8kWdC twin inverter**

CABIN GENERAL CHARACTERISTICS

		Thermal Part
Type		RITTAL TS 8
External dimensions W x H x D (front view)		800 x 2000 x 800 mm / 31,50 x 78,74 x 31,50 inch
Mounting plate W x H		699 x 1896 mm / 27,5 x 74,65 inches
Weight/pack		124 kg
Material		Sheet steel
Cold / Hot Supply - Brass		1 ¼ inch
Color		RAL 7035
Protection category IP to IEC 60 529		IP 55
Doors	1	
Light		Auto door power On/Off - 600 lumens
Scalability		Unlimited
Protection		Over-temperature, Anti-freeze control
Approvals		Bureau Veritas, CSA, TÜV, DNV-GL, Lloyds Register of Shipping, Russian Maritime Register of Shipping, UL + C-UL
Certificates		EAC,IK-Code, Protection category
Declarations		Declaration of conformity, Manufacturer's declaration
Certification		SRCC, Solar Keymark, CE

CABIN LIGHTING SYSTEM-TECHNICAL SPECIFICATIONS

		General Data
Type		RITTAL LED system light
Material		Light body: Extruded aluminium Light cover: Polycarbonate (halogen-free) Light ends: PC-ABS (halogen-free)
Color		Enclosure: RAL 7016
Protection category IP to IEC 60 529		IP 20
Dimensions		Width: 337 mm, Height: 55 mm, Depth: 23 mm
Rated operating voltage		100 V - 240 V, 1~, 50 Hz/60 Hz
Operating temperature		Operation (environment): -20°C...+55°C
Power consumption		7 W
Luminous flux		600 lm
Light colour		4000 K (neutral white)
Protection category		II (all-insulated)
Weight/pack		0.35 kg
Approvals		CCC, ENEC
Certificates		EAC

SOLAR TANK CHARACTERISTICS

T40

T50

T60

General Data

Type	Sammler SV		
Solar tank capacity	160 lt / 40 gal	200 lt / 50 gal	300 lt / 80 gal
External dimensions W x H	580 x 1058 mm 22,83 x 41,6 inch	580 x 1292 mm 22,83 x 50,9 inch	580 x 1735 mm 22,83 x 68,3 inch
Weight	67 kg / 235 lb	82 kg / 235 lb	107 kg / 235 lb
Number of boilers	1		
Max pressure primary circuit	3 bar		
Max pressure secondary circuit	3 bar		
Electric Resistance	1.50 – 4.00 KW (UL Ready) - not included		
Anti-corrosion protection	2 x magnesium anodes		
Certification	SRCC, Solar Keymark, CE		

SOLAR PUMP STATION

General Data

General Data

Type	Caleffi 279 series
Dimensions	Height (with controller extension): 381 mm Width (with insulation) : 203,2 mm
Suitable fluids	water, glycol solution
Max. percentage of glycol	50%
Maximum working temperature	air separator side supply: 320°F (160°C), pump side return: 230°F (110°C)
Max. working pressure	145 psi (10 bar)
Safety relief valve working temperature range	-20 to 320°F (-30–160°C)
Safety relief valve setting	90 psi (6 bar)
Check valve min. opening pressure (Dp)	1/4 psi (2 kPa)
Shut-off and check valves working temperature range	-20 to 320°F (-30–160°C)
Flow meter working temperature range	15 to 230°F (-10–110°C)
Flow rate adjustment range	2 to 8 gpm
Flow rate indicator accuracy	±10%
Pressure gauge scale	0 to 145 psi (0–10 bar)
Temperature gauge scale	32 to 320°F (0–160°C)
Connections	3/4" female straight thread
Hose connection	3/4"
Fill/drain connections	with hose connection 9/16" OD (15 mm)

Materials

Shut-off valve body	Brass
Check valve	Brass
Temperature gauge	steel/aluminum
Air Separator body	Brass
Instrument holder fitting body	Brass
Instrument holder fitting sealing gaskets	EPDM
Instrument holder fitting O-Ring seal elements	EPDM
Flow meter body	Brass
Flow meter transparent level gauge	PS
Flow meter flow indicator	Brass
Insulation material	PP
Insulation average thickness	20 mm
Insulation density	45 kg/m3
Insulation working temperature	-5...120°C
Insulation thermal conductivity	0.263 BTU·in/hr·ft ² ·°F 0.037 W/(m·K) at 50°F (10°C)
Insulation reaction to fire (UL94)	class HBF



CONTROLLER

General Data	
Type	Caleffi iSolar
Dimensions	Width: 171.45 mm, Height: 111.1 mm, Depth: 50.8 mm
Weight	0.4 kg
Housing	PC-ABS
Protection type	Indoor
Display	LCD
Interface	Three soft push buttons
Inputs	4 temperature sensors
Outputs	1 or 2 triac or standard relays
Switching Capacities	1 A - 115 VAC
Power Supply	12V - 24V
Power Consumption	1W, 1.5VA
Data Connection	V-Bus
Performance	
ΔT adjustment range	2-40° ΔT (1-20 °K)
Min. temperature differential	2° ΔT (1 °K)
Hysteresis	2° $\Delta T \pm 1^\circ \Delta T$ (1 °K $\pm 5^\circ \Delta T$)
Max. tank temperature range	210 - 375 °F (100 - 190 °C)
Emergency shut down of the collector	230 - 395 °F (110 - 200 °C)
Min. collector temperature option	50 - 195 °F (10 - 90 °C)
Antifreeze temperature option	15 - 50 °F (-10 - 10 °C)
kWh (BTU) flow input	0 - 5 gpm (0 - 20 lpm)
Agency approvals	cTUVus
Temperature Sensors	
Platinum RTD type	1,000 ohm
Collector sensor working range	-58 - 355 °F (-50 - 180 °C)
Tank sensor working range	15 - 175 °F (-10 - 80 °C)
Length of collector black cable	60 in (1.5 m)
Length of tank sensor gray cable	95 in (2.5 m)
Glycol (recommended type)	
Type	DOWFROST HD
Recommended temperature range	-46°C...163°C
Freezing Point	-33.5 °C
Boiling Point @ 1 bar	105.6 °C
Freeze protection temperature	-51 °C
Burst protection temperature	-73 °C
Weight % Propylene Glycol	94
Weight % performance additives	6
Specific gravity (15 °C)	1.053 - 1.062
pH of Solution	9.5 - 10.5
Reserve alkalinity	15.0 ml

TECHNICAL DATA AND TYPES

Fimer type code

UNO-DM-6.0-TL-PLUS-US-Q

General specifications

Rated grid AC voltage (V_{acr})	208 V	240 V
Nameplate Apparent Power (S_{max})	6650 VA	6650 VA
Nameplate Output Active Power (P_{max} @ $\cos\phi=1$)	6000 W	6000 W
P_{RATED} : Output Active Power @ V_{ACr} and $\cos\phi=\pm 0,9$	6000 W	6000 W

Input side (DC)

Number of independent MPPT channels	2	2
Maximum usable power for each channel	4000 W	4000 W
Absolute maximum voltage (V_{max})	600 V	600 V
Start-up voltage (V_{start})	200 V (Adj. 120-350 V)	200 V (Adj. 120-350 V)
Full power MPPT voltage range with parallel MPPT configuration at P_{acr}	200-480 V	200-480 V
Operating MPPT voltage range	$0.7*V_{start} - 580 V (\geq 90)$	$0.7*V_{start} - 580 V (\geq 90)$
Maximum usable current per channel	20 (CH1) - 11.5 (CH2)	20 (CH1) - 11.5 (CH2)
Maximum current (I_{dmax})	31,5 A	
Maximum short circuit current per channel	24 A	24 A

Output side

Grid connection type	1 Φ /2W	Split- Φ /3W
Adjustable voltage range ($V_{min}-V_{max}$)	183-228 V	211-264 V
Grid frequency	60 Hz	60 Hz
Adjustable grid frequency range	50-64 Hz	50-64 Hz
Maximum current ($I_{ac,max}$)	30 A	30 A
Power factor	>0.995, adj. +/-0.8	>0.995, adj. +/-0.8
Total harmonic distortion at rated power	<2%	<2%
Contributory fault current	40 Arms; 100 ms	40 Arms; 100 ms
Grid wiring termination type	Terminal block, pressure damp, AWG20-6	

Input protections

Reverse polarity protection	Yes, from limited current source
Over-voltage protection type	Varistor
PV array ground fault detection	Pre start-up RISO and dynamic GFDI

Output protections

Anti-islanding protection	Meets UL1741 / IEEE1547 requirements
Over-voltage protection type	Varistor, 2 (L1 - L2 / L1 - G)
Maximum AC OCPD rating	40 A

Efficiency

Maximum efficiency	97.4%	97.4%
CEC efficiency	96.5%	97%

Operating performance

Stand-by consumption	<8 W _{RMS}
Nighttime consumption	<0.6 W _{RMS}

Auxiliary Output

Isolated Auxiliary Power Supply ¹⁾	24 V, 0.4 A max
---	-----------------

TECHNICAL DATA AND TYPES

Fimer Type code

UNO-DM-6.0-TL-PLUS-US-Q

Embedded communication

Embedded communication interface	Wireless ²⁾
Embedded communication protocol	ModBus TCP (SunSpec)
Commissioning tool	Web User Interface
Monitoring	Aurora Vision cloud (Plant Portfolio Manager, Plant Viewer, Energy Viewer)

Optional board UNO-DM-COM kit

Optional communication interface	RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF
Optional communication protocol	ModBus RTU (SunSpec), Aurora Protocol

Optional board UNO-DM-PLUS Ethernet COM kit

Optional communication interface	Ethernet, RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF
Optional communication protocol	ModBus TCP (SunSpec), ModBus RTU (SunSpec), Aurora Protocol

Environmental

Ambient air operating temperature range	-25...+60°C / -13...140°F (derating above 45°C/113°F)
Relative humidity	5-100% RH condensing
Maximum operating altitude without derating	6560ft (2000m)

Mechanical specifications

Enclosure rating	Type 4X
Cooling	Natural convection
Dimension (H x W x D)	28.7 x 21.7 x 8.7 in (729 x 553 x 222 mm) ³⁾
Weight	47.4 lb (21.5 kg) ³⁾
Mounting system	Wall bracket
Conduit connections	Bottom: Markings for (2) Concentric KOs 1", 3/4" and (2) KOs 1/2" Sides: Markings for Concentric KOs 1", 3/4" ³⁾
DC switch rating	32A - 600 V


Safety

Isolation level	Transformerless (floating array)
Safety and EMC standard	UL1741, IEEE1547.1, CSA-C22.2 N. 107.1-01, UL1998, UL 1699B-2018, FCC Part 15 Class B
Grid standard	UL 1741 SA, IEEE 1547, Rule 21, Rule 14 (HI)
Safety approval	CTUVUS

Available models

Model with DC switch, wiring box, AFD, RSD supply output

UNO-DM-6.0-TL-PLUS-US-SB-RA-QU

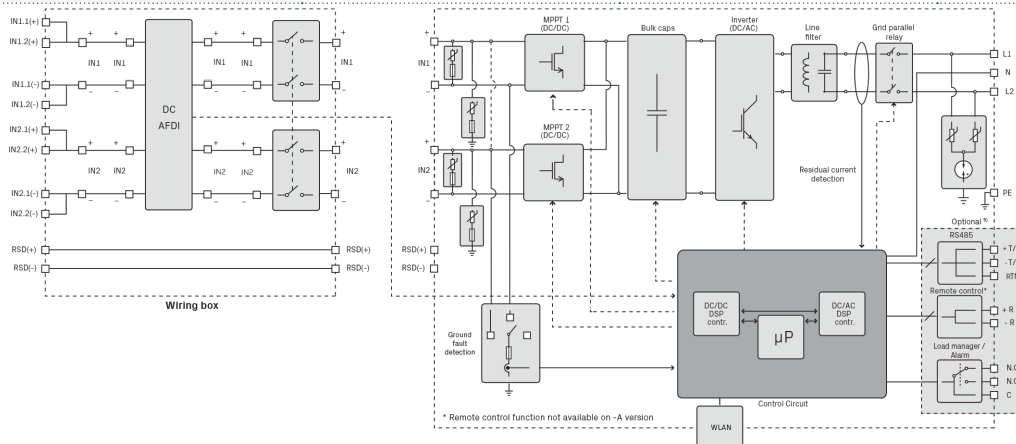

UNO-DM-6.0-TL-PLUS-US-Q string inverter block diagram

Models using other branded solar thermal or solar electric gear upon demand.