



### Codes

E1313I-T160DSE	E1313I-T200DSE	E1313I-T300DSE	E1313I-T500DSE
E1316I-T160DSE	E1316I-T200DSE	E1316I-T300DSE	E1316I-T500DSE

**Fegen Solar Modules SM series** are All-in-One, Plug & Play, Outdoor, Scalable enclosures that incorporate all solar thermal and solar electric distribution gear for buildings in one device.

- No need of a conventional indoor boiler room
- No on-site labor cost
- Immediate start-up
- No responsibility conflicts
- Easy control and maintenance
- Scalable for infinite combinations

- **Tight double door dimensions**
- **160-500 liters water storage**
- **Integrated heating element**
- **Simple DC pump design**
- **Solar back up system for redundancy**
- **Defrost system for reliability**
- **Solar pool gear option (P extension coded)**
- **Robust protected-ventilated 3ph 13-16kWdC inverter**

### CABIN GENERAL CHARACTERISTICS

	Thermal Part	Electrical Part
Type	RITTAL TS 8	
External dimensions W x H x D (front view)	800 x 2000 x 800 mm 31,50 x 78,74 x 31,50 inch	400 x 2000 x 800 mm 15,75 x 78,74 x 31,5 inch
Mounting plate W x H	699 x 1896 mm / 27,5 x 74,65 inches	
Weight/pack	203 kg	124 kg
Material	Sheet steel	
Cold / Hot Supply - Brass	1 ¼ inch	
Color	RAL 7035	
Protection category IP to IEC 60 529	IP 55	
Doors	1	1
Light	Auto door power On/Off - 600 lumens	
Scalability	Unlimited	
Protection	Over-temperature, Anti-freeze control	
Approvals	Bureau Veritas, CSA, TÜV, DNV-GL, Lloyds Register of Shipping, Russian Maritime Register of Shipping, UL + C-UL	
Certificates	EAC,IK-Code, Protection category	
Declarations	Declaration of conformity, Manufacturer's declaration	

### CABIN LIGHTING SYSTEM-TECHNICAL SPECIFICATIONS

General Data	
Type	RITTAL LED system light
Material	Light body: Extruded aluminium Light cover: Polycarbonate (halogen-free) Light ends: PC-ABS (halogen-free)
Color	Enclosure: RAL 7016
Protection category IP to IEC 60 529	IP 20
Dimensions	Width: 337 mm, Height: 55 mm, Depth: 23 mm
Rated operating voltage	100 V - 240 V, 1~, 50 Hz/60 Hz
Operating temperature	Operation (environment): -20°C...+55°C
Power consumption	7 W
Luminous flux	600 lm
Light colour	4000 K (neutral white)
Protection category	II (all-insulated)
Weight/pack	0.35 kg
Approvals	CCC, ENEC
Certificates	EAC

## VENTILATION - TECHNICAL SPECIFICATIONS

	Fan	Thermostat
Type	RITTAL TopTherm	RITTAL internal thermostat
Color	RAL 7035	RAL 7035
Protection category IP to IEC 60 529	IP 54 with standard filter and additional fine filter mat: IP 55 with standard filter and hose-proof hood: IP 56	
Protection category NEMA	with standard filter: Type 12 with standard filter and additional fine filter mat: Type 12 with standard filter and hose-proof hood: Type 3, 3R, 4, 4X	
Air throughput (unimpeded air flow):	At 50 Hz: 230 m <sup>3</sup> /h At 60 Hz: 250 m <sup>3</sup> /h	
Air throughput with outlet filter including standard filter mat (output 50/60 Hz)	203/230 m <sup>3</sup> /h	
Rated operating voltage:	115 V, 1~, 50 Hz/60 Hz	24 V - 230 V, 1~24 V - 60 V (DC)
Dimensions	Width: 255 mm Height: 255 mm	Width: 71 mm Height: 71 mm Depth: 33.5 mm
Build depth	25 mm	
Installation depth	107 mm	
Temperature range:	Bearing: -30°C...+70°C Operation (environment): -30°C...+55°C	Setting range: +5°C...+60°C
Power consumption	At 50 Hz: 40 W, At 60 Hz: 42 W	
Rated current (max.)	At 50 Hz: 0.52 A, At 60 Hz: 0.48 A	
Miniature circuit breaker/ fuse	4 A	
Noise level	At 50 Hz: 54 dB(A), At 60 Hz: 56 dB(A)	
Diagonal fan	Diagonal, self-starting shaded pole motor	
Weight/pack	2.26 kg	0.1 kg
Approvals	Approval overview CSA UL + C-UL - FTTA UR + C-UR	UL + C-UL VDE
Certificates	EAC	EAC
Declarations	Declaration of conformity	Declaration of conformity

SOLAR TANK CHARACTERISTICS	T160	T200	T300	T500
<b>General Data</b>				
Type	Sammler SV			TESY EV
Solar tank capacity	160 lt / 40 gal	200 lt / 50 gal	300 lt / 80 gal	500 lt / 132 gal
External dimensions W x H	580 x 1058 mm 22,83 x 41,6 inch	580 x 1292 mm 22,83 x 50,9 inch	580 x 1735 mm 22,83 x 68,3 inch	580 x 1674 mm 22,83 x 66 inch
Weight	67 kg / 235 lb	82 kg / 235 lb	107 kg / 235 lb	145 kg / 320 lb
Number of boilers	1			
Max pressure primary circuit	3 bar			8 bar
Max pressure secondary circuit	3 bar			6 bar
Electric Resistance	1.50 – 4.00 KW (UL Ready) - not included			
Anti-corrosion protection	2 x magnesium anodes			
Certification	SRCC, Solar Keymark, CE			Solar Keymark, CE

### DC CIRCULATION PUMP

<b>General Data</b>	
Type	DC Solar Pump
Power	10W (6-24 Vdc)
Max Capacities	22 Lpm / 6 Gpm
Max heads	3,2 m / 10,5 ft
Suitable fluids	Water / Glycol
Maximum working temperature	110 °C / 230 °F
Max. working pressure	10 bar
Number of DC Pumps	1
Protection	Over-temperature, overload, Over voltage, dry running protection

<b>Temperature Sensors</b>	
Platinum RTD type	1,000 ohm
Collector sensor working range	-58 - 355 °F (-50 - 180 °C)
Tank sensor working range	15 - 175 °F (-10 - 80 °C)
Length of collector black cable	60 in (1.5 m)
Length of tank sensor gray cable	95 in (2.5 m)

<b>Glycol (recommended type)</b>	
Type	DOWFROST HD
Recommended temperature range	-46°C...163°C
Freezing Point	-33.5 °C
Boiling Point @ 1 bar	105.6 °C
Freeze protection temperature	-51 °C
Burst protection temperature	-73 °C
Weight % Propylene Glycol	94
Weight % performance additives	6
Specific gravity (15 °C)	1.053 - 1.062
pH of Solution	9.5 - 10.5
Reserve alkalinity	15.0 ml

## TECHNICAL DATA AND TYPES

Fimer type code	PVI-10.0-TL-OUTD	PVI-12.5-TL-OUTD
<b>Input side</b>		
Absolute maximum DC input voltage ( $V_{max,abs}$ )	900 V	
Start-up DC input voltage ( $V_{start}$ )	360 V (adj. 250...500 V)	
Operating DC input voltage range ( $V_{dmin} \dots V_{dmax}$ )	0.7 x Vstart...850 V (min 200 V)	
Rated DC input voltage ( $V_{dcr}$ )	580 V	
Rated DC input power ( $P_{dcr}$ )	10300 W	12800 W
Number of independent MPPT	2	
Maximum DC input power for each MPPT ( $P_{MPPTmax}$ )	6500 W	8000 W
DC input voltage range with parallel configuration of MPPT at $P_{acr}$	300...750 V	360...750 V
DC power limitation with parallel configuration of MPPT	Linear derating from max to null [750 V ≤ VMPPT ≤ 850 V]	
DC power limitation for each MPPT with independent configuration of MPPT at $P_{acr}$ max unbalance example	6500 W [380 V ≤ VMPPT ≤ 750 V] the other channel: $P_{dcr}$ -6500 W [225 V ≤ VMPPT ≤ 750 V]	8000 W [445 V ≤ VMPPT ≤ 750 V] the other channel: $P_{dcr}$ -8000 W [270 V ≤ VMPPT ≤ 750 V]
Maximum DC input current ( $I_{dcmax}$ ) / for each MPPT ( $I_{MPPTmax}$ )	34.0 A / 17.0 A	36.0 A / 18.0 A
Maximum input short circuit current for each MPPT	22.0 A	
Number of DC input pairs for each MPPT	2	
DC connection type <sup>1)</sup>	PV quick fit connector <sup>1)</sup>	
<b>Input protection</b>		
Reverse polarity protection	Inverter protection only, from limited current source	
Input over voltage protection for each MPPT-varistor	Yes	
Photovoltaic array isolation control	According to local standard	
DC switch rating for each MPPT (version with DC switch)	25 A / 1000 V	
Fuse rating (versions with fuses)	15 A / 1000 V	
<b>Output side</b>		
AC grid connection type	Three-phase 3W+PE or 4W+PE	
Rated AC power ( $P_{acr}$ @cosφ=1)	10000 W	12500 W
Maximum AC power ( $P_{acmax}$ @cosφ=1)	11000W <sup>2)</sup>	13800W <sup>3)</sup>
Maximum apparent power ( $S_{max}$ )	11500 VA	13800 VA
Rated AC grid voltage ( $V_{acr}$ )	400 V	
AC voltage range <sup>2)</sup>	320...480 V <sup>4)</sup>	
Maximum AC output current ( $I_{ac,max}$ )	16.6 A	20.0 A
Contributory fault current	19.0 A	22.0 A
Rated output frequency (f) <sup>3)</sup>	50/60 Hz	
Output frequency range ( $f_{min} \dots f_{max}$ ) <sup>3)</sup>	47...53 Hz / 57...63 Hz <sup>3)</sup>	
Nominal power factor and adjustable range	> 0.995, adj. ± 0.9 with $P_{acr}$ =10.0 kW, ± 0.8 with max 11.5 kVA	> 0.995, adj. ± 0.9 with $P_{acr}$ =12.5 kW, ± 0.8 with max 13.8 kVA
Total current harmonic distortion	< 2%	
AC connection type	Screw terminal block, cable gland M40	
<b>Output protection</b>		
Anti-islanding protection	According to local standard	
Maximum external AC overcurrent protection	25 A	
Output overvoltage protection - varistor	3 plus gas arrester	
<b>Operating performance</b>		
Maximum efficiency ( $\eta_{max}$ )	97.8%	
Weighted efficiency (EURO/CEC)	97.1% / -	97.2% / -
Feed in power threshold	30.0 W	
Night consumption	< 1.0 W	

## User interface

### Fimer Type code

PVI-10.0-TL-OUTD

PVI-12.5-TL-OUTD

### Communication

Wired local monitoring

PVI-USB-RS232\_485 (opt.)

Remote monitoring

VSN300 Wifi Logger Card (opt.), VSN700 Data Logger (opt.)

Wireless local monitoring

VSN300 Wifi Logger Card (opt.)

User interface

16 characters x 2 lines LCD display

### Environmental

Ambient temperature range

-25...+60°C (-13...+140°F)  
with derating above 55°C (131°F)

-25...+60°C (-13...140°F)  
with derating above 50°C (122°F)

Relative humidity

0...100 % condensing

Sound pressure level, typical

50 dBA @ 1 m

Maximum operating altitude without derating

2000 m / 6560 ft

### Physical

Environmental protection rating

IP 65

Cooling

Natural

Dimension (H x W x D)

716 mm x 645 mm x 224 mm / 28.2" x 25.4" x 8.8"

Weight

< 41.0 kg / 90.4 lbs

Mounting system

Wall bracket

### Safety

Isolation level

Transformerless

Marking

CE (50 Hz only), RCM

Safety and EMC standard

EN 50178, IEC/EN 62109-1, IEC/EN 62109-2, AS/NZS 3100, AS/NZS 60950.1, EN 61000-6-2, EN 61000-6-3, EN 61000-3-11, EN 61000-3-12

Grid standard  
(check your sales channel for availability)

CEI 0-21, CEI 0-16, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G59/3, C10/11, EN 50438 (not for all national appendices), RD 1699, RD 413, RD 661, P.O. 12.3, AS/NZS 4777, IEC 61727, IEC 62116, BDEW, MEA, NRS 097-2-1, VFR 2014

### Available products variants

Standard

PVI-10.0-TL-OUTD

PVI-12.5-TL-OUTD


With DC switch

PVI-10.0-TL-OUTD-S

PVI-12.5-TL-OUTD-S

PVI-10.0-TL-OUTD-FS

PVI-12.5-TL-OUTD-FS

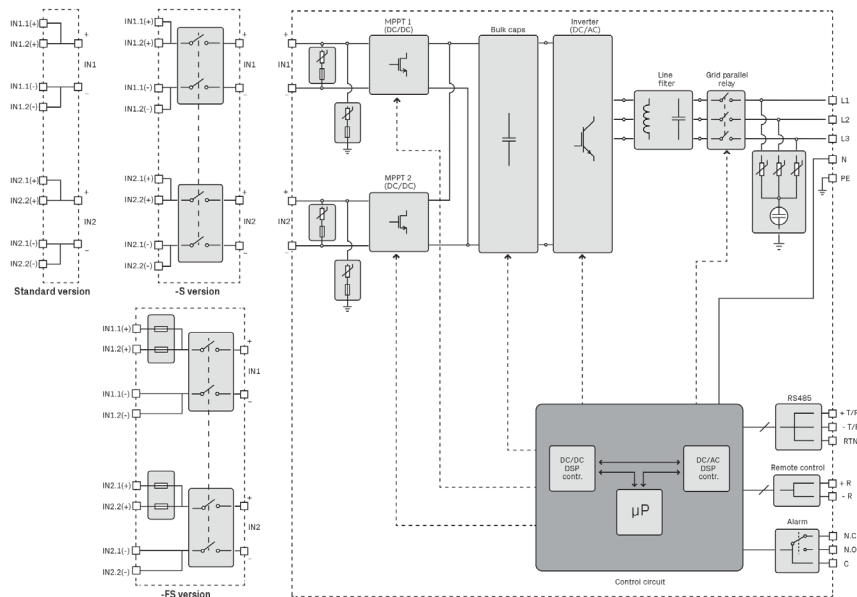

**PVI-10.0/12.5-TL-OUTD string inverter block diagram**

Models using other branded solar thermal or solar electric gear upon demand.